

LED622 CCT Tunable LED Bulb

Quick Start Guide

1. Introduction

The LED622 ZigBee CCT Tunable LED bulb allows you to switch it ON and OFF and adjust its brightness and color temperature as well as set a switching schedule from the mobile app.


2. Get started

To get started, you will need:

- A SEG-X3 Smart Gateway
- A LED622 ZigBee CCT Tunable LED Bulb
- The mobile app

Then follow the steps below:

Step 1: Turn OFF the switch

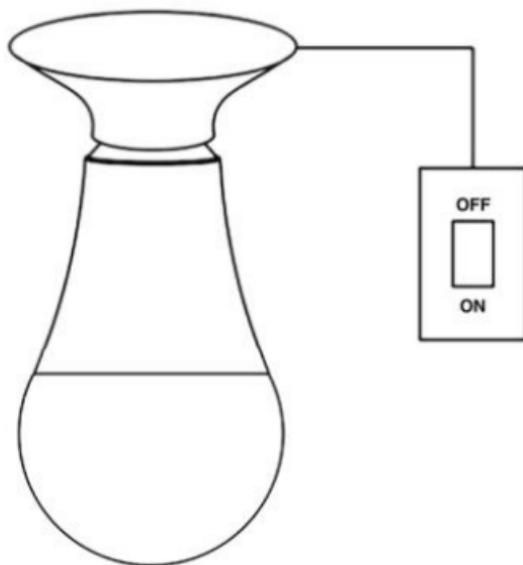


Step 2: Fit the LED622 LED Bulb into the lamp socket.

Step 3: Turn ON the switch and check if the LED622 LED Bulb flashes twice, if so follow the below steps, otherwise, please refer to the FAQ section.

Step 4: Turn OFF the Switch


Step 5: Select “Add new devices” in the menu of the app.

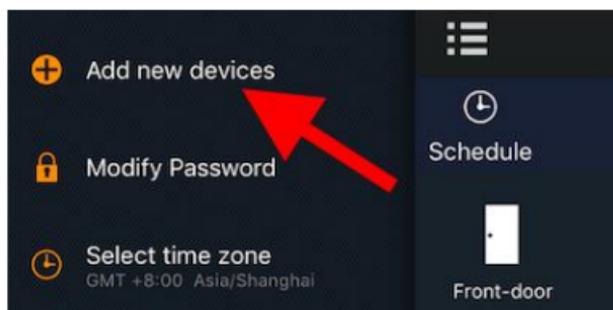

Tip: for this step, press the “Z” button of the gateway for two seconds until the LED indicator turns solid blue.

Step 6: Turn ON the switch, the LED622 LED Bulb will flash twice.

Step 7: The LED622 will try to pair with the gateway, the LED622 LED Bulb will flash once more when pairing is successful. Please go to the app to check if it is paired successfully.

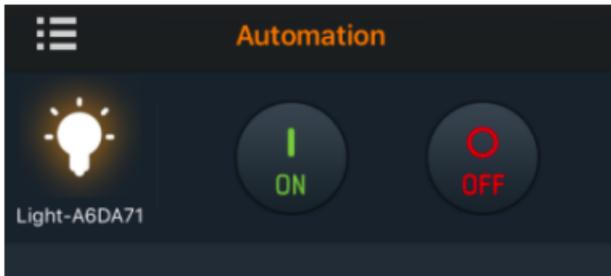

You are now able to control the LED622 LED Bulb using the mobile app.

- Turn ON/OFF
- Adjust the adjust brightness
- Adjust the color temperature

3. FAQ

Q1. How can I return this device to default factory settings?

A1: Toggle the power to the LED622 LED bulb off, on, off, on, off, on, off, on, off, on, off, on (six on and six off) in slow succession. The LED will flash twice if it successfully returns to the factory default settings.

Q2. Can I use a dimmer switch to control this LED622 LED bulb rather than the mobile app?

A2: Yes. Please see the SLC603 dimmer switch user guide.

4. Technical Specifications

Operating Voltage	E27 (EU & AU): 220 - 240V E26 (US): 120V
Operating Wattage	8.5W
Lumen	806lm
Average Lifetime	25000Hrs
Optional Base	E27 E26
CCT	2700 ~ 6000k
CRI	Ra70 - 90
Beam Angle	240°
Dimensions	Diameter: 60mm
Thickness	108mm
Weight	75 g
Mounting Type	Mounted on bracket

5. Safety Notice



WARNING: Failure to follow these safety notices could result in fire, electric shock, other injuries, or damage to the device or other property. Read all the safety notices below before using the device.

- Avoid high humidity or extreme temperatures.
- Avoid long exposure to direct sunlight or strong ultraviolet light.
- Do not drop or expose the unit to intense vibration.
- Do not disassemble or try to repair the unit yourself.
- Do not expose the unit or its accessories to flammable liquids, gases or other explosives.